

15V2T[®]




Premium Outdoor Warning Siren

#1 in Durability and Reliability #1 in Motor Horsepower #1 in Overall Sound Output #1 in Affordability
Nearly 3 Sq. Miles of coverage in all directions at all times. NON ROTATING means NO DELAYS and NO DEAD SPOTS !!!

Important Facts to Consider:

- Electro-Mechanical** Warning Siren. No speakers or amplifiers here, just real, honest, big-time, worry free sound.
- 100% Maintenance Free.** Not just a part of the siren, the whole system !!
- NON-ROTATING.** Forget about the worries of rotating sirens, this unit only has two moving parts !!
- Mechanically** produced sound - stronger and further reaching than electronically produced sound.
- Proven**, this siren has been deployed in cities around the world, and is the best selling dual tone siren available today.
- Lifetime Tech Support** is included with every siren. No matter how old your siren is, we will help you through any problems.
- FIVE YEAR WARRANTY** so you can rest assured your siren will be functional at all times.**

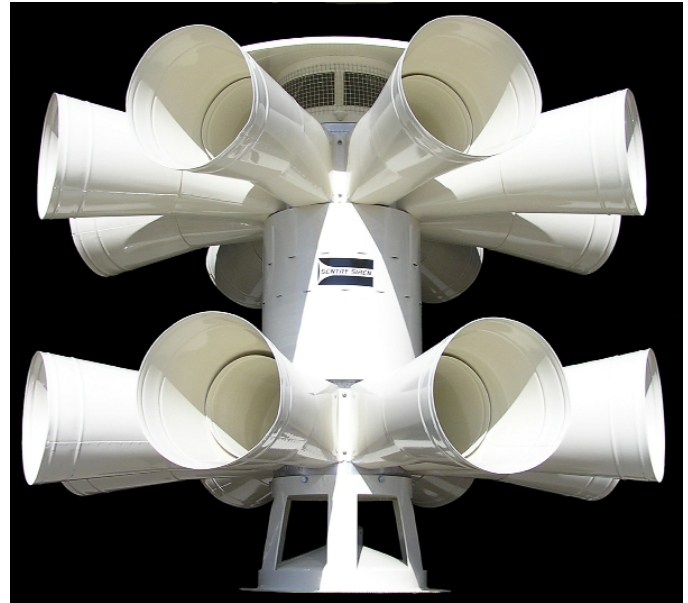

Designed for medium or small, growing communities this siren is a true workhorse. It is also our most popular dual tone siren. Rated at 122 dB at 100 feet, the Model 15V2T is an OMNI-DIRECTIONAL siren which produces continuous 360° coverage, making it a superior alternative to a rotating siren.

The 15V2T is available in either single or three phase power. The Model 15V2T is a dual tone siren, employing two rotors with different numbers of ports to produce a greater range of frequency. One rotor produces 460 cycles per second, and the other produces 920 cycles per second. The Model 15V1T is a single tone siren, with both rotors producing 460 cycles per second.

All exposed siren components are of metal construction, which are "Powder Coated" for the most durable finish available. The fan and housing are made of non-corrosive cast aluminum. Maximum diameter of the Model 15V2T shall be 78", maximum height of 65", and maximum mounting base of 19" square. Shipping weight of the siren alone is 750 lbs.

A clear step up in size and reliability !!!

15V2T[®]

Premium Outdoor Warning Siren

Power Specifications

122 dB. at 100 ft.* (+/- 3 dB)

Three Phase Motor:

15 hp. 208/230/460V, 60 Hz.

Starting Amps: 170

Running Amps: 34

Single Phase Motors***:

(2) 7 ½ hp. 230 Volt,

60 Hz. Motors.

Starting Amps: 132

Running Amps: 24

***note, Uses a double starter

Battery powered version available.

Accessories Included With Battery Powered Version:

Battery Center - Includes Charging System, Battery Cabinet, Battery Cabinet Pole Mounting Stand, and Motor Starter. Shipping weight - 255 lbs.



Want your siren in a different color?

Above are the standard color choices, or call and we can match any color in the spectrum!!

Accessories Available

Siren Control Centers

Push button controls with up to 5 functions including test and cancel. Reliable and field adjustable, now you can customize your siren's functions anytime.



Magnetic Motor Starter

Available in "Lightning Proof" versions and also weather-proof or NEMA 4X (Fistic).

Radio Control Equipment

Hand-holds, desk mounts, and receivers available with up to four functions. Solid state and built to last!



Utility pole mounting bracket

No more searching for a pole to fit the bracket. We build it to fit your pole.

- Don't forget to ask about our financing options. Take delivery of your siren system today, and pay over time.

P.O. Box 386
2812 N. 9th St
Canon City, CO 81212



1-866-4-A-SIREN
Fax: 719-269-3397
www.SentrySiren.com

*Assumes perfect conditions; Actual levels may vary by local conditions and terrain.

**Five year warranty available for an extra fee.